



Individually Shielded Pairs with Overall Foil/Braid Shield

Cable Characteristics

Attenuation

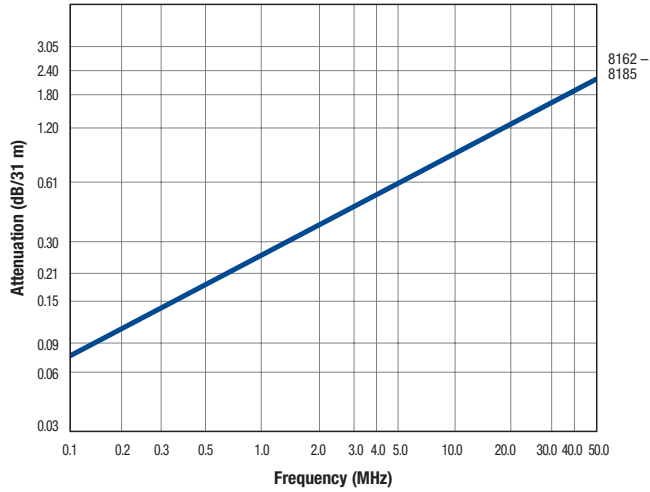


Rise Time

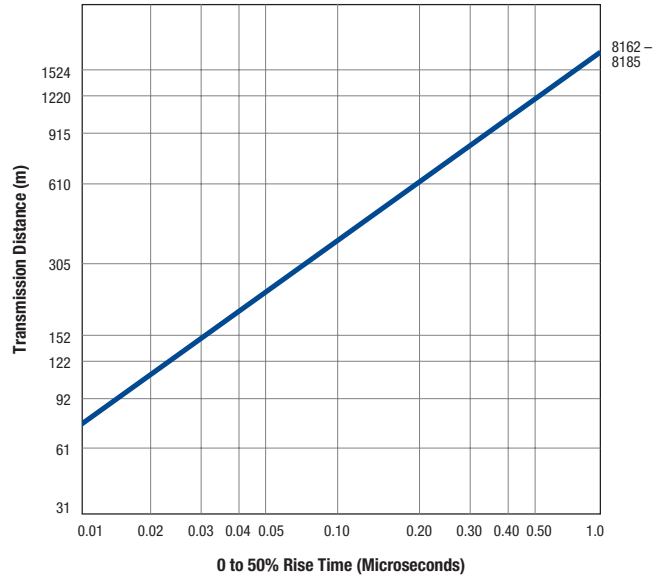

Cables are terminated in their characteristic impedance. Signal source electrical characteristics: 50 Ohm and 10% to 90% rise time less than 5 nanoseconds.

Bit Rate

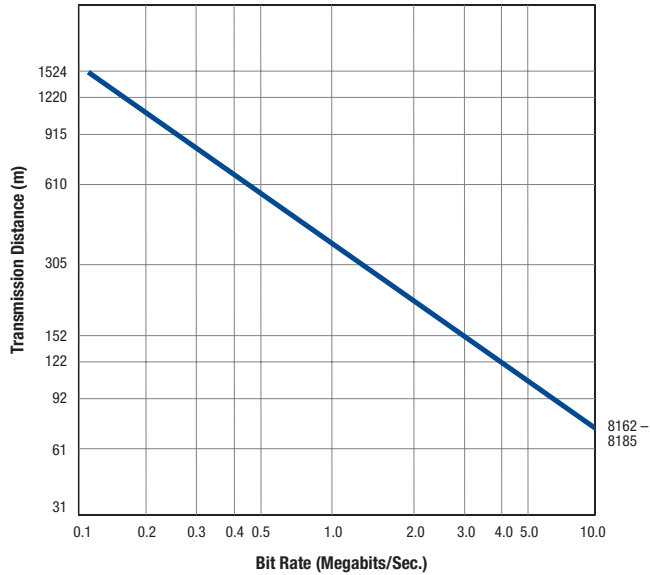

Charts assume 5% peak-to-peak time jitter as determined by eye pattern measurements of pseudorandom NRZ code.