
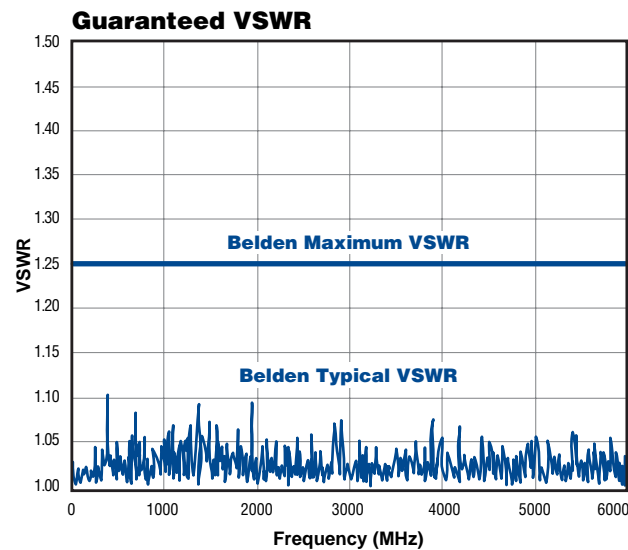
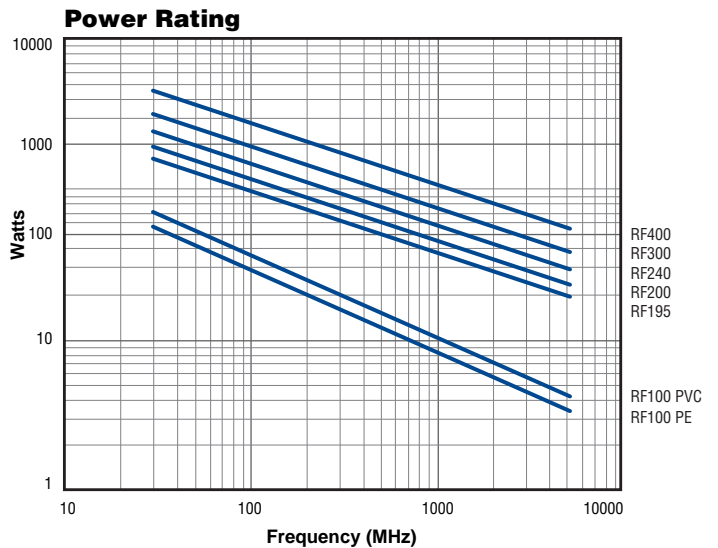


# Low Loss 50 Ohm Wireless RF Transmission Coax

## Electrical Characteristics

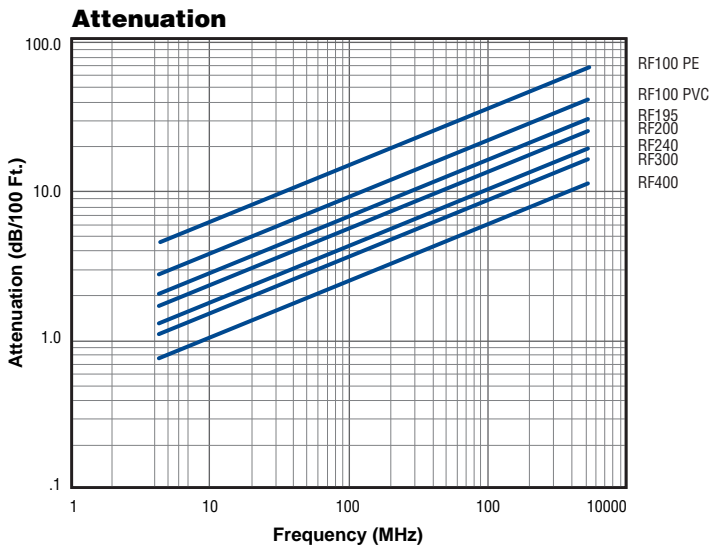

Voltage Standing Wave Ratio is a measurement of the reflected power in a cable or instrument. The higher the VSWR the poorer the transmission characteristics of the cable.

### Phase Stability

Phase Attribute	Typical Range (0.45 GHz to 6.0 GHz)	
	ppm/°C	Degree/GHz/m
Temperature (-40°C to +85°C) <sup>1</sup>	±9	±0.6
Bending & Flexing (25 cycles) <sup>2</sup>	NA	±1.1

1: Per IEC 60966-1 clause 8.8  
2: Per IEC 60966-1 clause 8.6

### RG Cable Replacement Guide

Part Number	Size	Replacing
7805	RF100A	RG-174/U
7805R	RF100LL	RG-174/U
7806A	RF195	RG-58/U
7807A	RF200	RG-58/U
7808A	RF240	RG-8X
7809A	RF300	RG-8X
7810A	RF400	RG-8U